Crane Scale

SE-OCS-XS2 series

Wireless Transmission
Steel Type

Drawing:

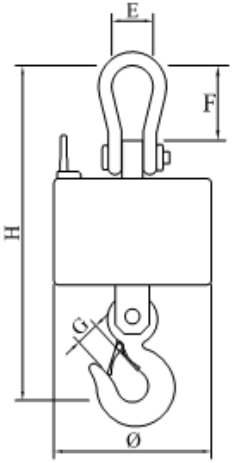

XK3168A Portable

XK3168E LCD Display

DP100 Large Screen

Above weighing indicator is optional

Technical parameters and function character:

Steel Shell
Transferable units of kg and lb

Accuracy Class	OIML III
Tarring Range	100% scale capacity
Display Steady Time	5-10 seconds
Ultimate Safety Factor	4
Maximum Safety Overload	125% scale capacity

Effective wireless transmission distance >100m
Sealed and maintenance-free rechargeable batteries of 12V/7Ah(>=10t,scale), or 12V/3.3Ah(<10t,scale) and 6V/5Ah(instrument)

Specifications:

Model No.	Capacity(kg)	Division Value(kg)	Number	Size(mm)					N.W.(kg)
				H	E	F	G	Φ	
SE-OCS-XS2-1	1000	0.5	2000	475	56	65	22	270	25
SE-OCS-XS2-2	2000	1	2000	490	56	65	25	270	25
SE-OCS-XS2-3	3000	1	3000	510	56	65	32	270	27
SE-OCS-XS2-5	5000	2	2500	595	72	90	36	270	33
				620*	85	115			
SE-OCS-XS2-10	10000	5	2000	690	90	110	50	270	42
				750*	110	160			
SE-OCS-XS2-15	15000	5	3000	885	140	230	60	320	80
SE-OCS-XS2-20	20000	10	2000	930	140	230	70	320	87
SE-OCS-XS2-30	30000	10	3000	1110	160	260	90	350	155
SE-OCS-XS2-40	40000	20	2000	1200	180	220	110	420	220
				1270*	180	290			
SE-OCS-XS2-50	50000	20	2500	1310	200	270	110	420	265
				1380*	230	340			

Note:
*--optional, extended shackle
size and weight are only for your reference.